





SNR BEARING CORP.OF CANADA LTD.

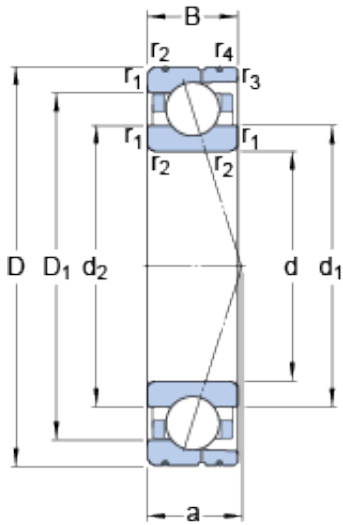

60 mm x 85 mm x 13 mm SKF 71912
ACD/P4AL angular contact ball bearings

Bearing No. 71912 ACD/P4AL

71912 ACD/P4AL Bearing 2D drawings and 3D CAD models

Size	85x60x13 mm
Bore Diameter	85 mm
Outer Diameter	60 mm
Width	13 mm
d	60 mm
D	85 mm
B	13 mm
d ₁	67.7 mm
d ₂	67.7 mm
D ₁	77.3 mm
b	2.2 mm
C ₁	6.5 mm
C ₂	3.2 mm
C ₃	2 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	23.5 mm
d _a - min.	64.6 mm
d _b - min.	64.6 mm
D _a - max.	80.4 mm
D _b - max.	83 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
d _n	69.7 mm



SNR BEARING CORP.OF CANADA LTD.

Basic dynamic load rating - C	18.6 kN
Basic static load rating - C ₀	14.6 kN
Fatigue load limit - P _u	0.62 kN
Limiting speed for grease lubrication	14000 r/min
Limiting speed for oil lubrication	22000 mm/min
Ball - D _w	7.938 mm
Ball - z	24
G _{ref}	2.7 cm ³
Calculation factor - e	0.68
Calculation factor - Y ₂	0.87
Calculation factor - Y ₀	0.38
Calculation factor - X ₂	0.41
Calculation factor - Y ₁	0.92
Calculation factor - Y ₂	1.41
Calculation factor - Y ₀	0.76
Calculation factor - X ₂	0.67
Preload class A - G _A	120 N
Preload class B - G _B	240 N
Preload class C - G _C	480 N
Preload class D - G _D	960 N
Calculation factor - f	1.17
Calculation factor - f ₁	0.98
Calculation factor - f _{2A}	1
Calculation factor - f _{2B}	1.04
Calculation factor - f _{2C}	1.08
Calculation factor - f _{2D}	1.14
Calculation factor - f _{HC}	1



SNR BEARING CORP.OF CANADA LTD.

Preload class A	128 N/micron
Preload class B	166 N/micron
Preload class C	218 N/micron
Preload class D	292 N/micron
d_1	67.7 mm
d_2	67.7 mm
D_1	77.3 mm
C_1	6.5 mm
C_2	3.2 mm
C_3	2 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	64.6 mm
d_b min.	64.6 mm
D_a max.	80.4 mm
D_b max.	83 mm
r_a max.	1 mm
r_b max.	0.3 mm
d_n	69.7 mm
Basic dynamic load rating C	18.6 kN
Basic static load rating C_0	14.6 kN
Fatigue load limit P_u	0.62 kN
Attainable speed for grease lubrication	14000 r/min
Attainable speed for oil-air lubrication	22000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	24
Reference grease quantity G_{ref}	2.7 cm ³
Preload class A G_A	120 N
Static axial stiffness, preload class A	128 N/ μ m



SNR BEARING CORP.OF CANADA LTD.

Preload class B G_B	240 N
Static axial stiffness, preload class B	166 N/ μ m
Preload class C G_C	480 N
Static axial stiffness, preload class C	218 N/ μ m
Preload class D G_D	960 N
Static axial stiffness, preload class D	292 N/ μ m
Calculation factor f	1.17
Calculation factor f_1	0.98
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.04
Calculation factor f_{2C}	1.08
Calculation factor f_{2D}	1.14
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.19 kg